



DB25 Pin-out for M-Audio Audiophile 192 card

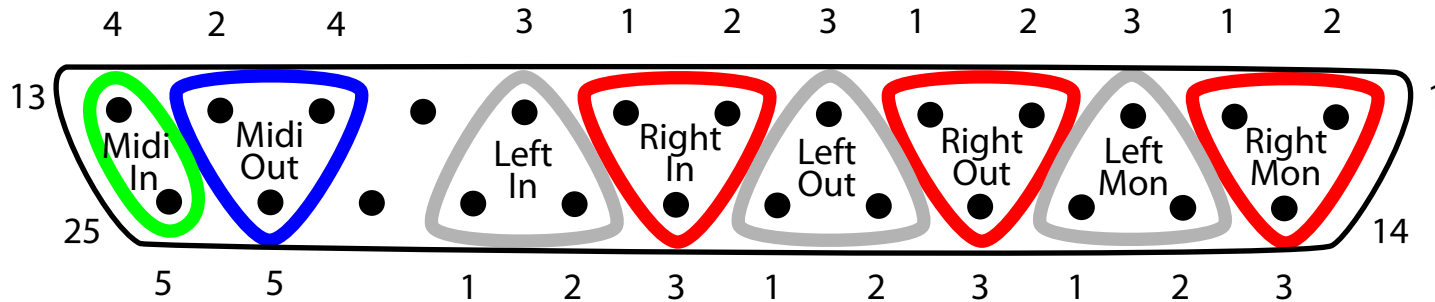

| | | | | | |
|--------|---------------|----------|--------|---------------|----------|
| Pin 1 | Right Monitor | - high | Pin 14 | Right Monitor | - low |
| Pin 2 | Right Monitor | - shield | Pin 15 | Left Monitor | - high |
| Pin 3 | Left Monitor | - low | Pin 16 | Left Monitor | - shield |
| Pin 4 | Right Output | - high | Pin 17 | Right Output | - low |
| Pin 5 | Right Output | - shield | Pin 18 | Left Output | - high |
| Pin 6 | Left Output | - low | Pin 19 | Left Output | - shield |
| Pin 7 | Right Input | - high | Pin 20 | Right Input | - low |
| Pin 8 | Right Input | - shield | Pin 21 | Left Input | - high |
| Pin 9 | Left Input | - low | Pin 22 | Left Input | - shield |
| Pin 10 | n/c | | Pin 23 | n/c | |
| Pin 11 | Midi Out | - +5 | Pin 24 | Midi Out | - IN |
| Pin 12 | Midi Out | - shield | Pin 25 | Midi Input | - IN - |
| Pin 13 | Midi Input | - IN + | | | |

Illustration is male DB25 shown from solder side.

1 2 3 - notation on balanced pairs reflect XLR pin configuration.

2 4 5 - notation on Midi pairs reflect pin location on female 5 Pin Din socket.